

BEKT-S901CAⅡ

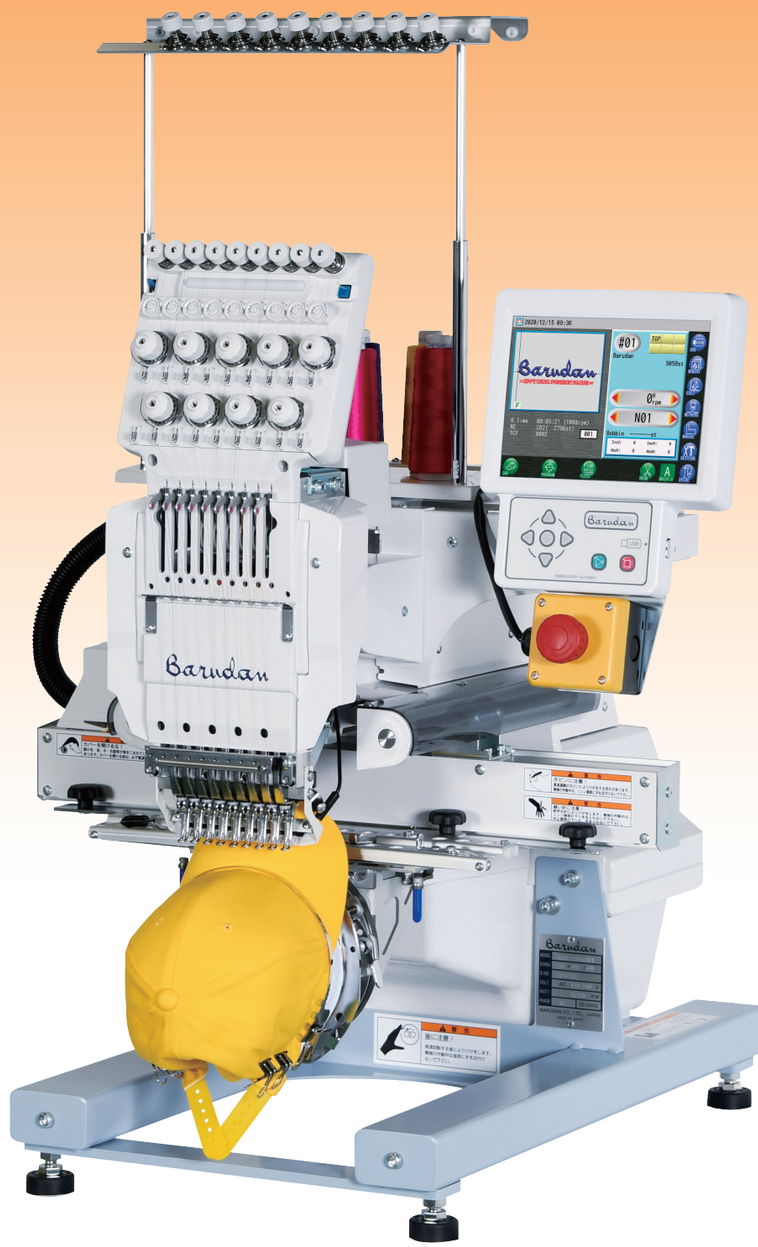


Barudan
THE MOST ADVANCED EMBROIDERY MACHINE SINCE 1959

Accessories

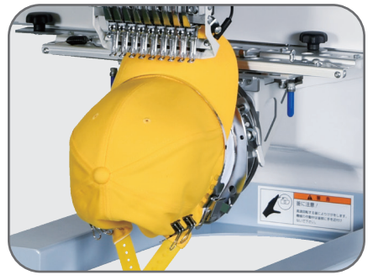


Wide Cap Frame

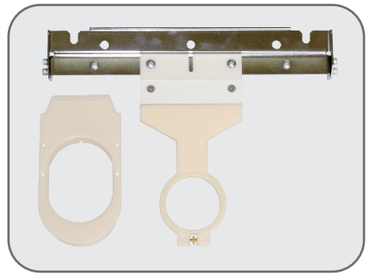

Sock Frames




Frames for Finished Products

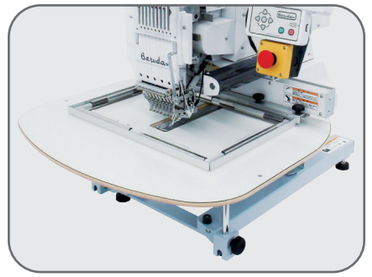

Detachable Table



Steel Stand

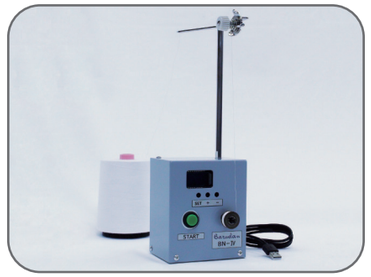

Bobbin Winder (BN-Ⅳ)


B-NET (Option)

Complete Production Management Software

B-NET is an embroidery machine networking system for seamless transfer of designs and offers the following.

Explorer → Editing → Distribution → Status and Stats → Reporting → Maintenance

Design File Server
Design transfer via LAN connection



Sewing Machine Manager
Machine status on floorplan



Design File Explorer
Design file viewing and managing



Design File Function Editor
Design editing and function changes



B-NET - Reporting
Productivity & status reporting

B-NET WEB
Machine status, history, and maintenance activities on browser (tablet compatible)

B-NET WEB API ※Optional
Web API lets B-NET integrate with the user's current order entry software



BARUDAN CO., LTD.

■Sales Headquarter
1-1 Dainichi, Minamiobuchi, Ichinomiya-city, Aichi-pref.,
491-0014 Japan
Phone +81 586-76-1137
Fax +81-586-77-1499
URL https://www.barudan.co.jp/
E-mail info@barudan.co.jp

Agent:

We reserve the right to change specifications without notice for the purpose of product improvement.

2025-10

BEKT-S901CAII

BEKT-S901CAII

MODEL
BEKT-S901CAII





- Frame Centering Function
- Frame Limit Function
  Able to restrict machine operation
  when a design does not fit to the frame or
  when there is a risk of a needle bar hitting the frame.
- Shortcuts
  Customize most-used icons to save time.
- LAN Connector Standard, 1 USB port
- Touch screen (8.4 inch, Resolution 800×600)
- 70 million stitch capacity, 100 memory locations

Name Drop

Separates names in a multiple name design for view and sewing purposes.




Name Drop Drive Mode



Name in Name List



Name in Thumbnail List




New tensioner system provides better and easier thread tensioning and improved thread break accuracy.


Features




Laser Pointer



LED Light



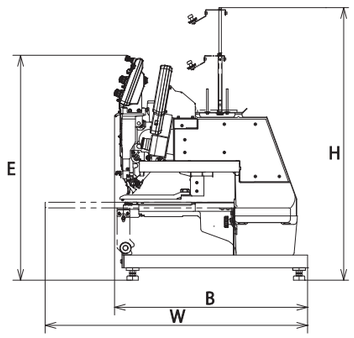

■Machine Specifications／Main Dimensions

MODEL	Embroidery Area (mm)	Cap Frame (mm)	Frames for Finished Products Maximum (mm)	Number of Needles	Stitch Length (mm)	Speed (rpm)	Power Supply (v)	Power Consumption (kw)	Dimensions (mm)							Weight (kg)
									L	W	H	A	B	C	E	
BEKT-S901CAII	250×400	72×360	(Usage Frame) 300×430 (Availability Embroidery Area) 250×400	9	0.1～12.7	(Tubular Frame) 200～1200 (Cap Frame) 200～1000	1φ100～240	0.225	600	930	965	680	690	765	800	71

■ The embroidery area indicated above allows for maximum pantograph movement.
The frame used may restrict the actual embroidery field size.
■ Machines and Specifications are subject to change at any time without prior notice.

Barudan
THE MOST ADVANCED EMBROIDERY MACHINE SINCE 1959