BELY-FII series

High-Speed Compact Machine



MODEL
BELY-Y912FII


LS Automat Features


- Touch screen (12.1inch, resolution 1280×800)
- Easy Operation
- USB 3.0 Type-A 2 ports, USB 2.0 Type-A 1 port
- 1000BASE-T LAN connector standard
- 300 million stitch capacity, 300 memory locations

■Machine Specifications／Main Dimensions


MODEL	Embroidery Area (mm)	Needle Distance (mm)	Continuous Design (mm)	Number of Needles	Stitch Length (mm)	Speed (rpm)	Power Supply (v)	Power Consumption Maximum (kw)	Dimensions (mm)		
									L	W	H
BELY-Y912FII	600×350／350	350	600×4200	9	0.1–12.7	200–1000	1φ 100–240 3φ 200–415	0.7	5355	1665	1565

Note 1: The embroidery area indicated above for maximum pantograph movement.
The frame used may restrict the actual embroidery field size.
Note 2: Other embroidery areas are available upon consultation.
Note 3: Machines and Specifications are subject to change at any time without prior notice.

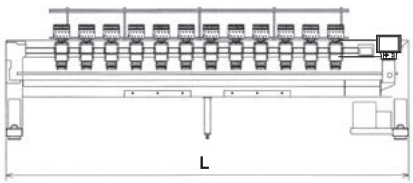




Accessories



One Touch Frames



Spider Frames



Boring Device

BARUDAN CO., LTD.

■Sales Headquarter
1-1 Dainichi, Minamiobuchi, Ichinomiya-city, Aichi-pref.,
491-0014 Japan
Phone +81 586-76-1137
Fax +81-586-77-1499
URL https://www.barudan.co.jp/
E-mail info@barudan.co.jp

Agent:

We reserve the right to change specifications without notice for the purpose of product improvement.

2026-07

Barudan
THE MOST ADVANCED EMBROIDERY MACHINE SINCE 1959